




MULTI-SPLIT HI-WALL

INDOOR UNIT

N3KV2

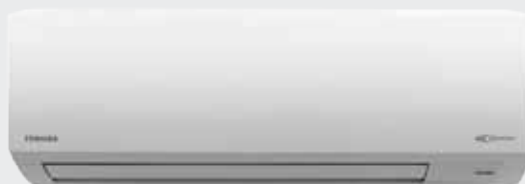

Toshiba IAQ filtration system

The new and improved Suzumi Plus in new design is a successful combination of optimized energy efficiency and effective air cleaning methods.

New smooth and elegant design.

Self-Cleaning function removes the moisture, while low density ozone decontaminates the indoor unit.

The one – touch function offers the combination of features that is perfect for you by pressing only one button.

The comfort sleep function maintains the most comfortable temperature while you sleep.

You can reach immediately the desired temperature by using the Hi POWER function.

The ECO function achieves energy-savings of up to 25% compared with standard settings without sacrificing comfort.

Toshiba IAQ filters for improving the indoor air quality.

N3KV2

Physical data Indoor unit

| Indoor unit | RAS- | | M07N3KV2-E1 | B10N3KV2-E1 | B13N3KV2-E1 | B16N3KV2-E1 | B22N3KV2-E1 | M24N3KV2-E1 |
|----------------------------------|-------------------------|---|-----------------|-----------------|-----------------|-----------------|------------------|------------------|
| Air Flow (max) | m ³ /h - l/s | C | 516 - 143 | 516 - 143 | 570 - 158 | 684 - 190 | 1080 - 300 | 1134 - 315 |
| Sound pressure level (h/l) | dB(A) | C | 38/26 | 38/26 | 39/26 | 45/30 | 47/35 | 49/37 |
| Sound power level (h/l) | dB(A) | C | 53 | 53 | 54 | 60 | 60/48 | 62/50 |
| Air Flow (max) | m ³ /h - l/s | H | 570 - 158 | 570 - 158 | 624 - 173 | 738 - 206 | 1098 - 305 | 1152 - 320 |
| Sound pressure level (h/l) | dB(A) | H | 39/28 | 39/28 | 40/28 | 45/31 | 47/35 | 49/37 |
| Sound power level (h/l) | dB(A) | H | 54 | 54 | 55 | 60 | 60/48 | 62/50 |
| Dimensions (HxWxD) | mm | | 275 x 790 x 217 | 275 x 790 x 217 | 275 x 790 x 217 | 275 x 790 x 217 | 320 x 1050 x 229 | 320 x 1050 x 229 |
| Weight | kg | | 10 | 10 | 10 | 10 | 13 | 13 |
| Flare connections (gas - liquid) | inch | | 3/8 - 1/4 | 3/8 - 1/4 | 3/8 - 1/4 | 1/2 - 1/4 | 1/2 - 1/4 | 1/2 - 1/4 |